



- 3 CABLE OUTER DIAMETER IS 0.39 IN.
MINIMUM BEND RADIUS FOR
CONTINUOUS FLEX IS 3 IN.
- 2 STRIP INSULATION BACK 3/8" AND TIN LEADS
- 1 STARTING CABLE LENGTH = FINISHED LENGTH + 3 FT.

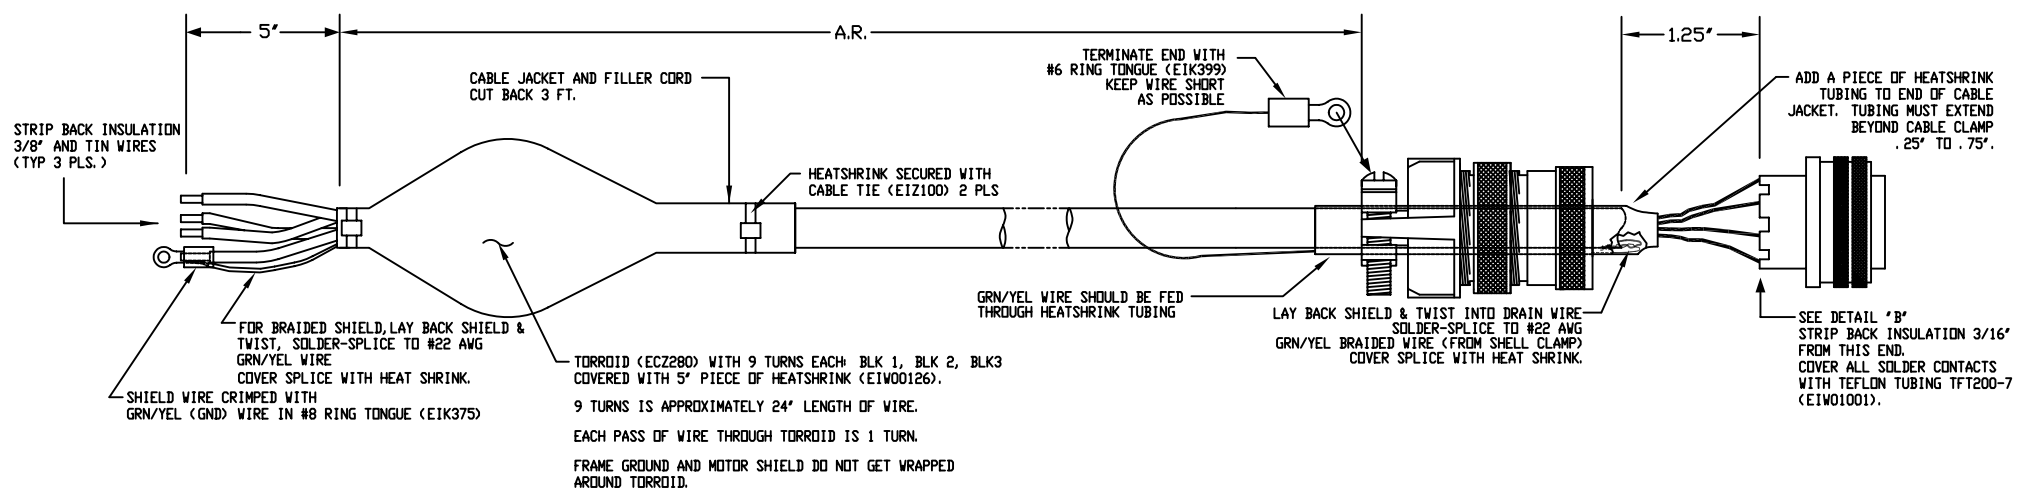

DETAIL "A"

VIEWED FROM WIRE SIDE OF CONNECTOR
AMPHENOL SOCKET INSERT MS18-10S (MCM495)

PROPRIETARY INFORMATION
THIS DRAWING IS THE PROPERTY
OF AEROTECH, INC. AND IS
SUBMITTED IN CONFIDENCE AND
SHALL NOT BE REPRODUCED NOR
COPIED NOR DISCLOSED TO OTHERS
UNDER PENALTY OF LAW.

AEROTECH ® AEROTECH, INC. 101 Zeta Drive
Pittsburgh, PA. 15238
(412)963-7470 TWX710-795-3125

TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
0 TO 6 ± 1/32	.XX ± .01	± 0-30'
OVER 6 ± 1/16	.XXX ± .005	

RMS FINISH	EXCEPT AS NOTED
✓	

DRAWN	EJB	2/2/01
CHECKED	AGS	2/2/01
APPD.	AGS	2/2/01

LIGHT DUTY, HI FLEX, BRUSHLESS MOTOR CABLE WITH NOISE FILTER			
PART CODE	SIZE	REV.	
PMCH-XX	c 630C1901-1	-	

SCALE NTS FILE NAME 630C1901-101.DWG SHEET 1 OF 1