



REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	DRAWN
A		ECN13576	9/8/11	EJB
B		ECN 15204	11/7/13	JFM
C		ADDED ECN 16031	8/29/14	JFM

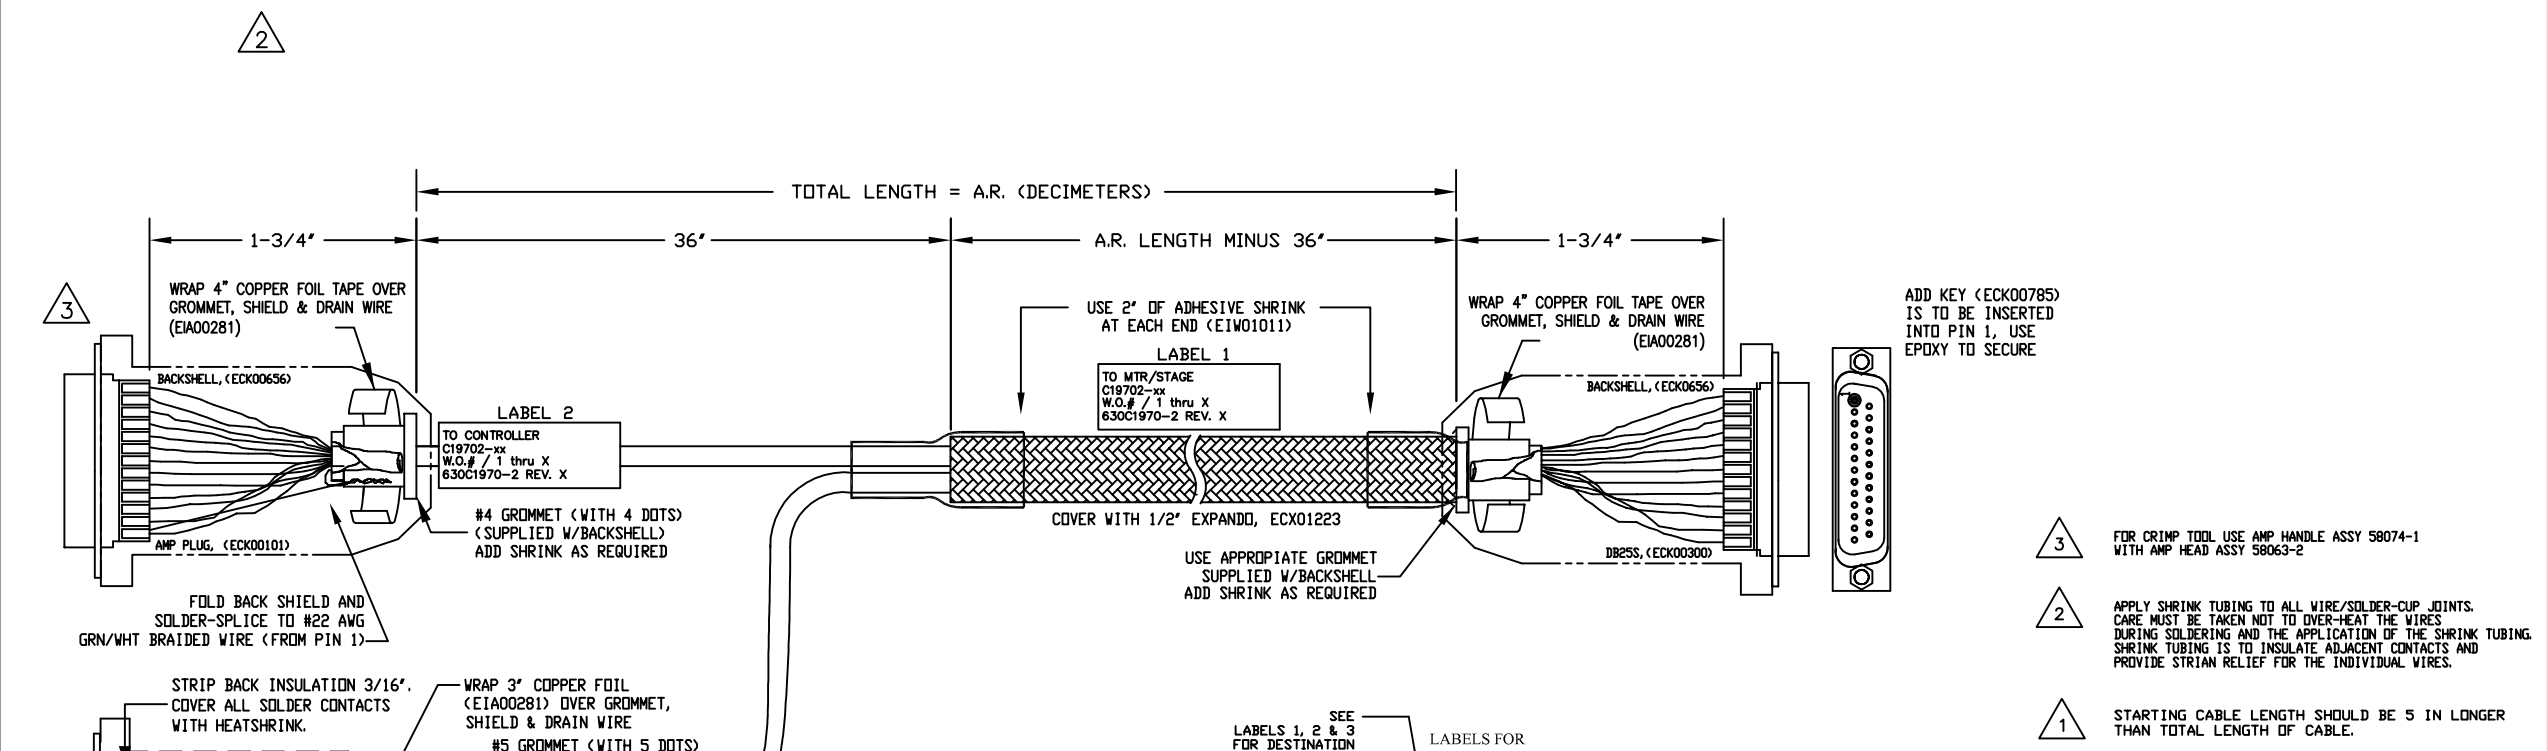

- 3 FOR CRIMP TOOL USE AMP HANDLE ASSY 58074-1 WITH AMP HEAD ASSY 58063-2
- 2 APPLY SHRINK TUBING TO ALL WIRE/SOLDER-CUP JOINTS. CARE MUST BE TAKEN NOT TO OVER-HEAT THE WIRES DURING SOLDERING AND THE APPLICATION OF THE SHRINK TUBING. SHRINK TUBING IS TO INSULATE ADJACENT CONTACTS AND PROVIDE STRAIN RELIEF FOR THE INDIVIDUAL WIRES.
- 1 STARTING CABLE LENGTH SHOULD BE 5 IN LONGER THAN TOTAL LENGTH OF CABLE.

PROPRIETARY INFORMATION THIS DRAWING IS THE PROPERTY OF AEROTECH, INC. AND IS SUBMITTED IN CONFIDENCE AND SHALL NOT BE REPRODUCED NOR COPIED NOR DISCLOSED TO OTHERS UNDER PENALTY OF LAW.		AEROTECH, INC. 101 Zeta Drive Pittsburgh, PA. 15238 (412)963-7470/www.aerotech.com	
C19702-XX HIGH-FLEX FEEDBACK & BRUSHLESS MOTOR CABLE 50 DECIMETERS (15') MAX LENGTH CABLE: BL MTR & FB-25DU 5DU-25DU-HF MAX50DM			
TOLERANCES ON FRACTIONS DECIMALS ANGLES 0 TO 6 ± 1/32 .XX ± .01 ± 0-30' OVER 6 ± 1/16 .XXX ± .005		RMS FINISH EXCEPT AS NOTED	
DRAWN 5/10/05 JAB	CHECKED 5/10/05 AGS	PART CODE C19702-XX	SIZE C
APPD. 5/10/05 AGS	SCALE NTS	FILE NAME 630C1970-2C1.DWG	SHEET 1 of 1

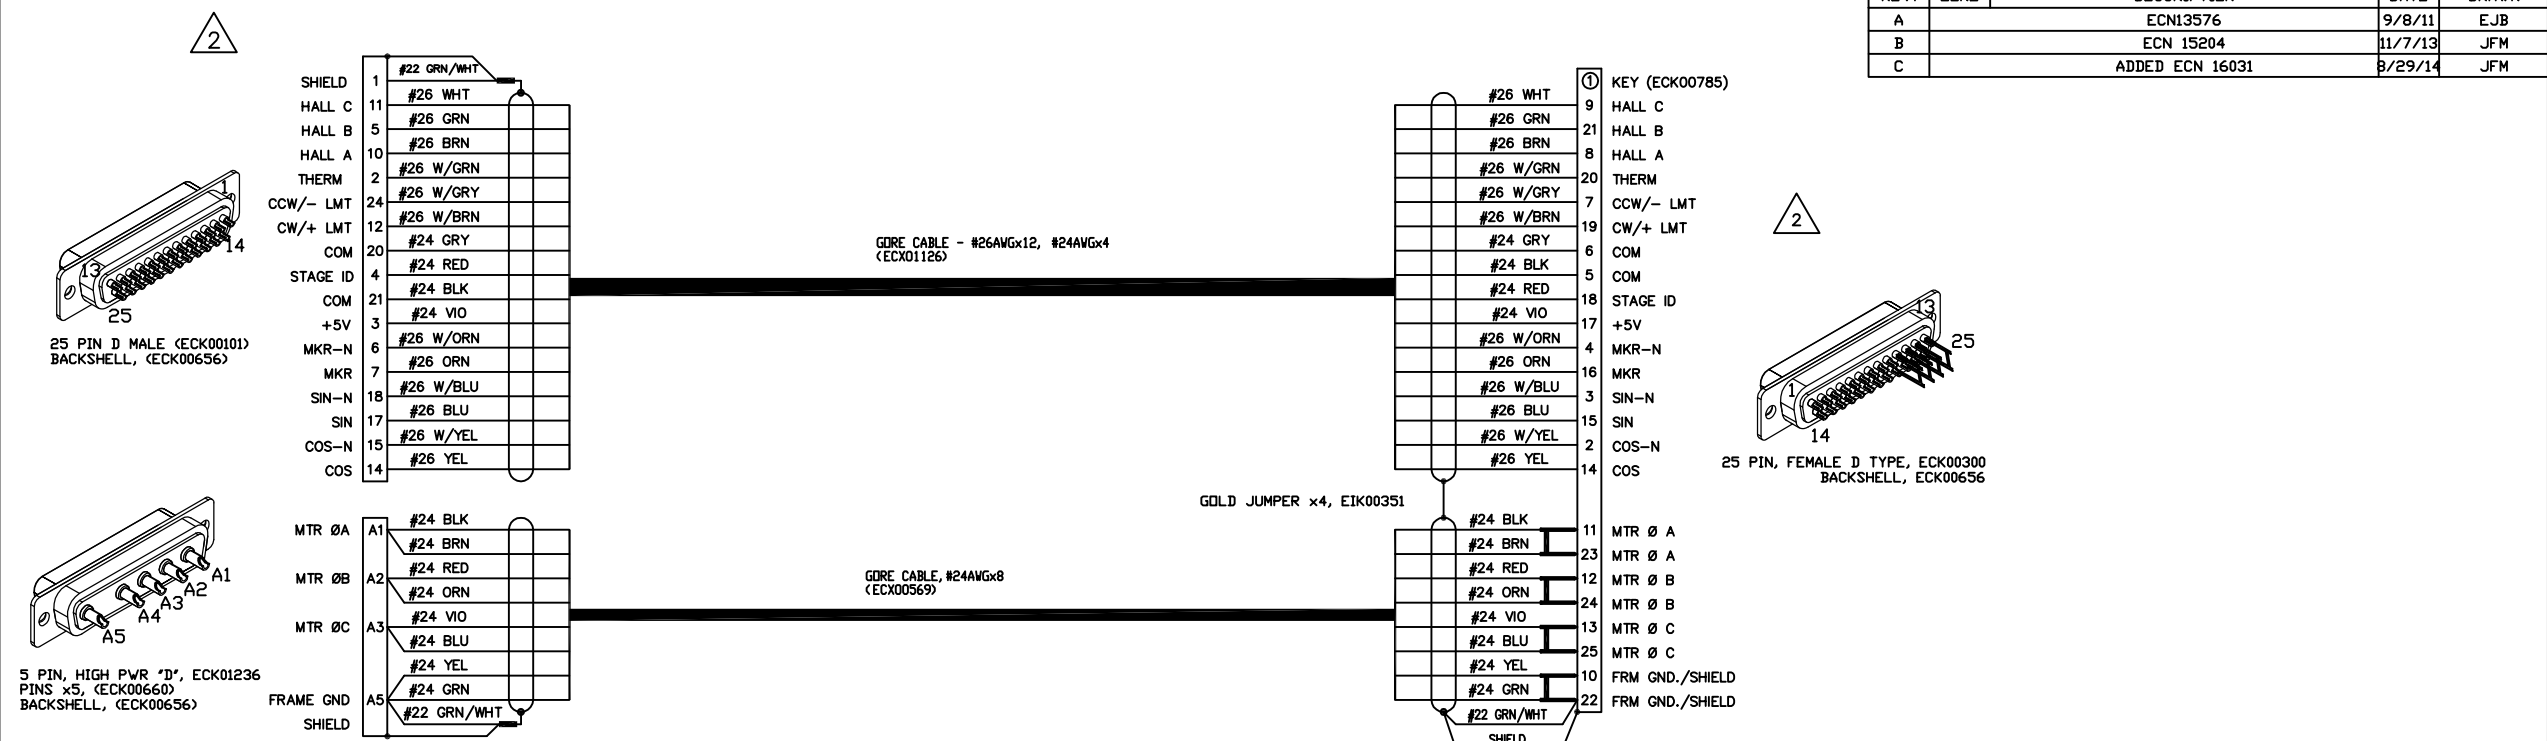