
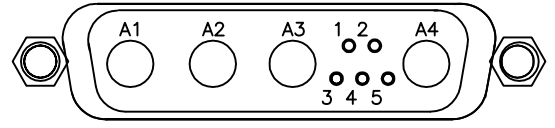
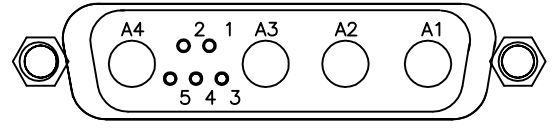
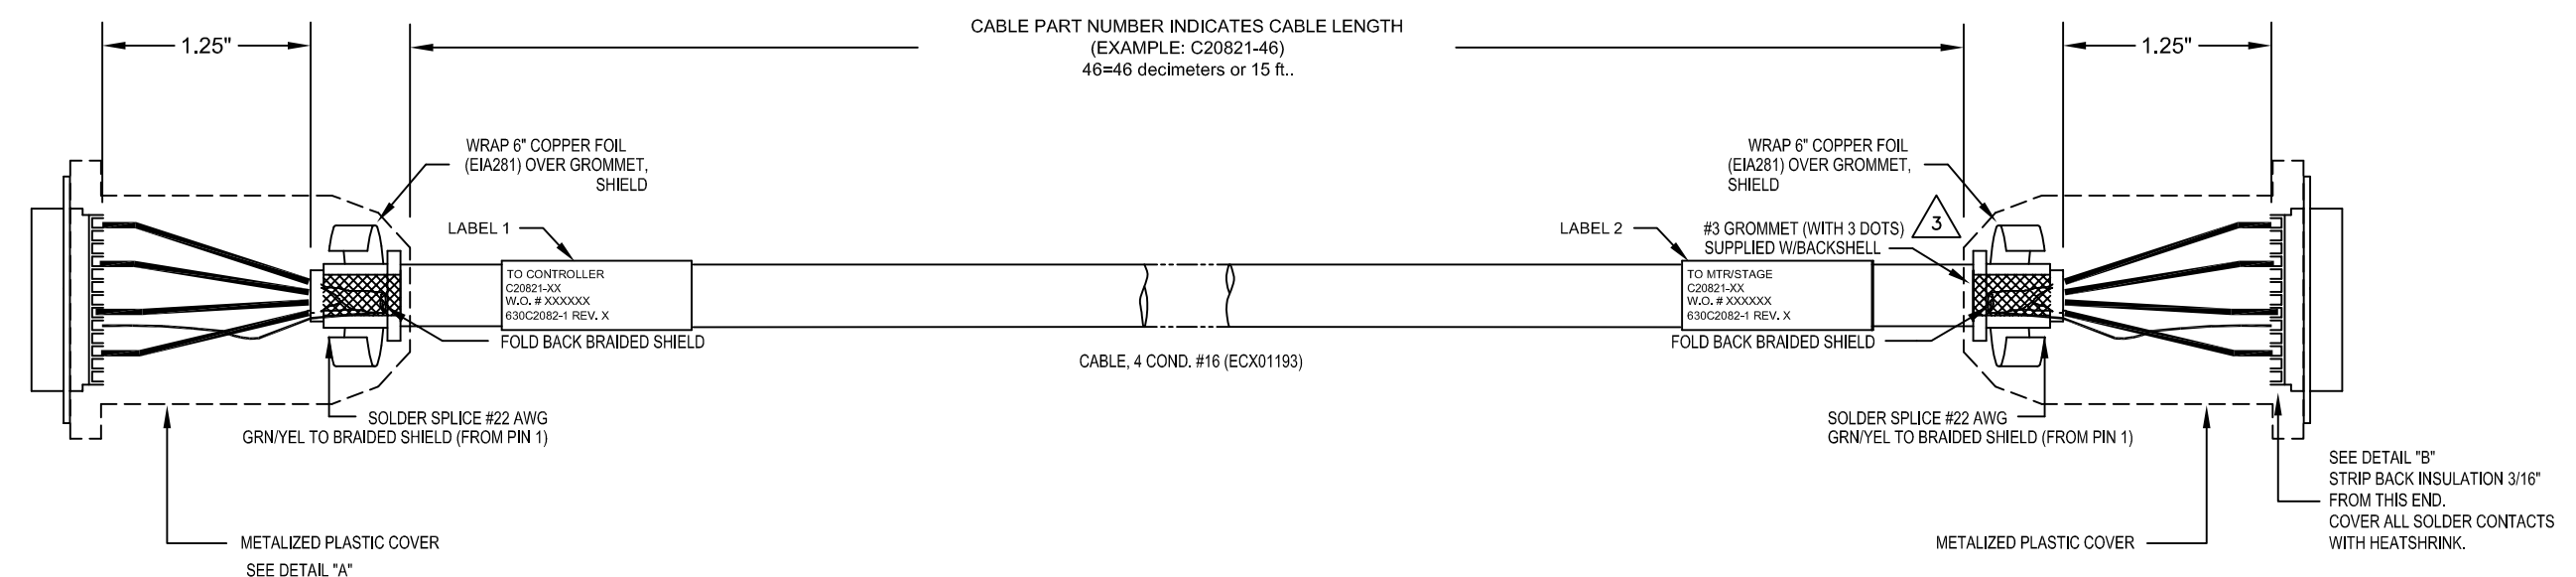


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL

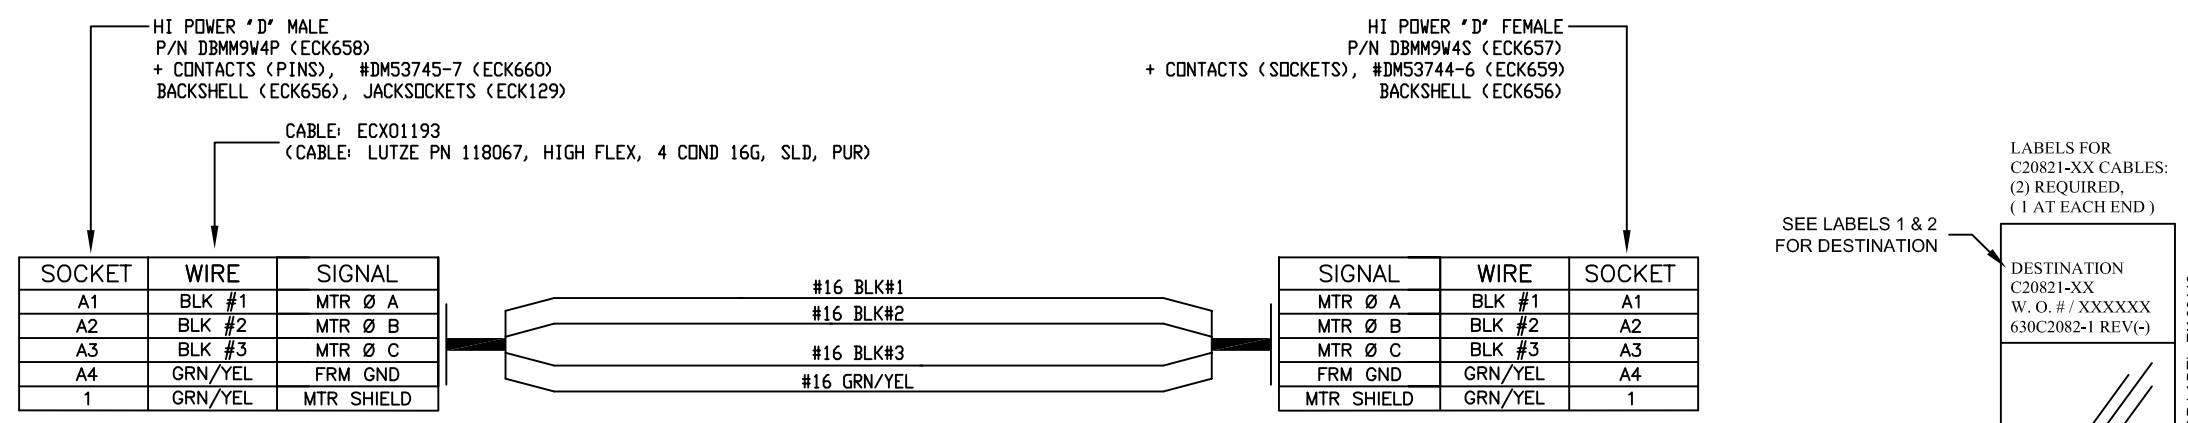

- 3 CABLE OUTER DIAMETER IS 0.39 IN. MINIMUM BEND RADIUS FOR CONTINUOUS FLEX IS 3 IN.
- 2 USE #3 GROMMET WITH 3 DOTS AS SHOWN BELOW WHICH IS SUPPLIED W/BACKSHELL
- 1 STARTING CABLE LENGTH = FINISHED LENGTH +1 FT.

PART CODE:		C20821-XX	C20821-1 TO -450 MAX LENGTH (DECIMETERS)
PROPRIETARY INFORMATION THIS DRAWING IS THE PROPERTY OF AEROTECH, INC. AND IS SUBMITTED IN CONFIDENCE AND SHALL NOT BE REPRODUCED NOR COPIED NOR DISCLOSED TO OTHERS UNDER PENALTY OF LAW.		AEROTECH, INC. 101 Zeta Drive Pittsburgh, PA. 15238 (412)963-7470 www.aerotech.com	
TOLERANCES ON FRACTIONS DECIMALS ANGLES 0 TO 6 3/32 .XX ±01 ± 0-30° OVER 6 1/16 .XXX ±005		C20821-XX HIGH FLEX MOTOR CABLE CABLE: BL MTR-4DU-4DU-HF-XXDM	
RMS FINISH	EXCEPT AS NOTED	PART CODE	SIZE
DRAWN	RWR 2/9/05	SEE ABOVE	C
CHECKED	AGS 2/9/05	630C2082-1	
APPD.	AGS 2/9/05	SCALE	NTS
FILE NAME		630C2082-101.DWG	SHEET
1 of 1			