

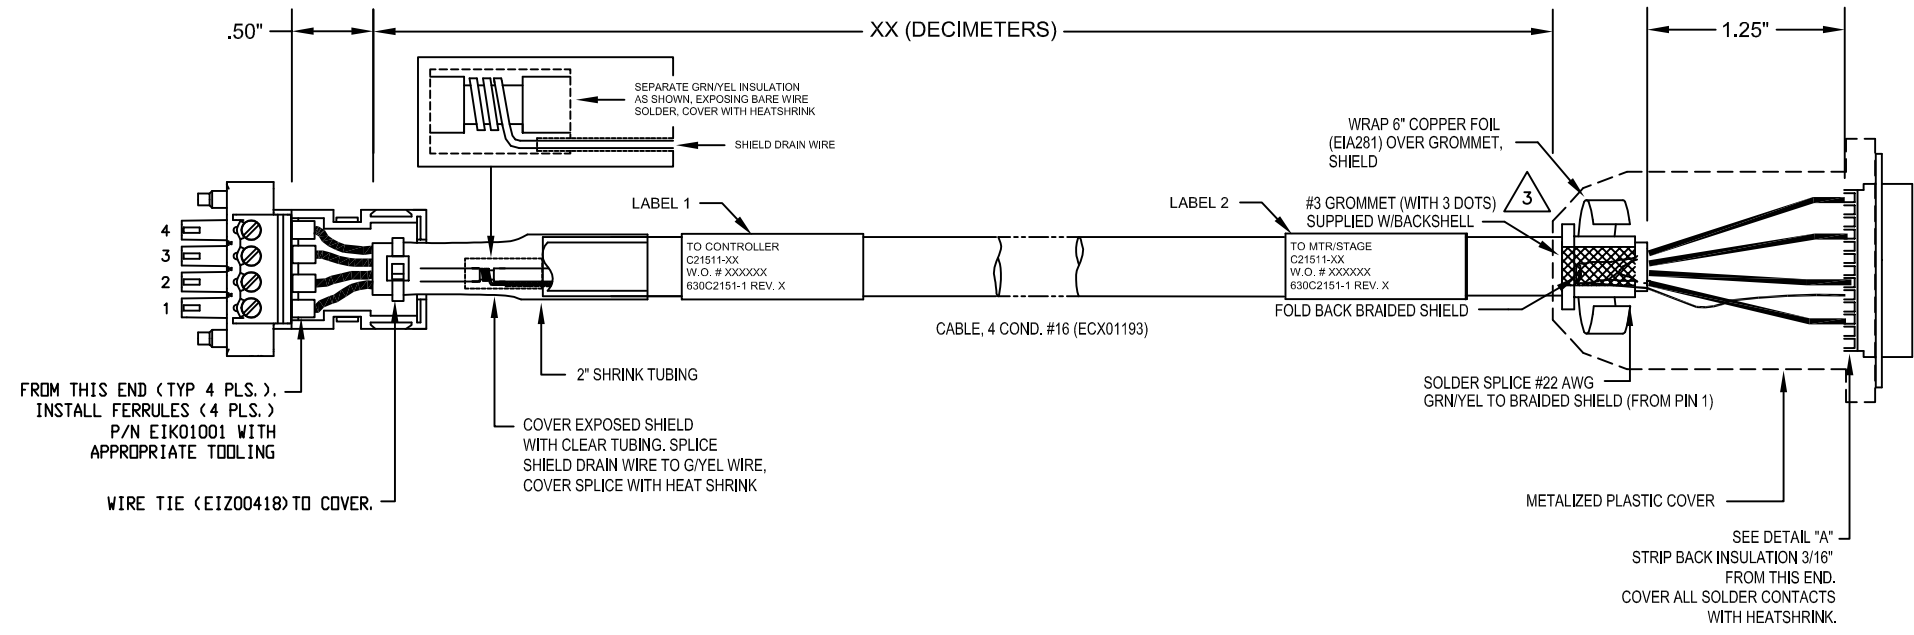
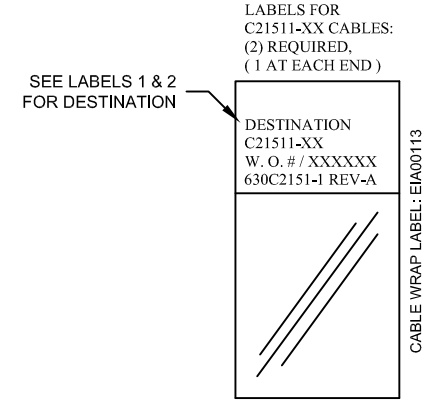


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL
A	ECN11269, REPLACED OBSOLETE ECX01272 WITH ECX01325	7/24/08	JLD

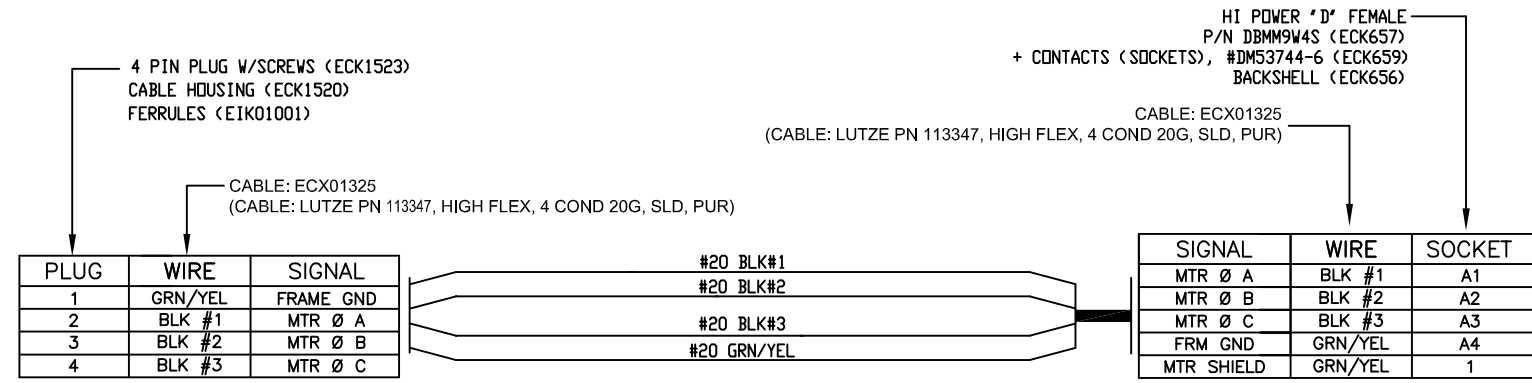

- CABLE OUTER DIAMETER IS 0.32 IN.
MINIMUM BEND RADIUS FOR
CONTINUOUS FLEX IS 3.9 IN.
- USE #3 GROMMET WITH 3 DOTS AS SHOWN BELOW
WHICH IS SUPPLIED W/BACKSHELL
- NOT APPLICABLE TO THIS DRAWING.
- XX (DECIMETER) X .328 = FT.
STARTING LENGTH = XX FT + 1.25 FT.
BOM VALUE = STARTING LENGTH + 1 FT.

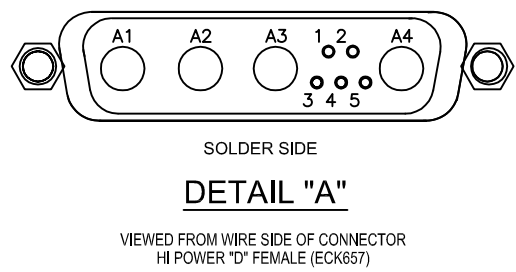

PROPRIETARY INFORMATION
THIS DRAWING IS THE PROPERTY
OF AEROTECH, INC. AND IS
SUBMITTED IN CONFIDENCE AND
SHALL NOT BE REPRODUCED NOR
COPIED NOR DISCLOSED TO OTHERS
UNDER PENALTY OF LAW.

TOLERANCES ON
FRACTIONS DECIMALS ANGLES
0 TO 6 3/32 .XX 401 ± 0-30'
OVER 6 1/16 .XXX 4005

RMS FINISH EXCEPT AS NOTED

DRAWN	GLK	5/8/06
CHECKED	EJB	5/8/06
APPD.	EJB	5/8/06

PART CODE:
C21511-XX C21511-1 TO -450 MAX LENGTH (DECIMETERS)

AEROTECH, INC. 101 Zeta Drive
Pittsburgh, PA. 15238
(412)963-7470
www.aerotech.com

C21511-XX HIGH FLEX MOTOR CABLE
CABLE: BL MTR-4TS-4DU-LP1-HF-MAX450DM

PART CODE	SIZE	REV.
SEE ABOVE	C	A

SCALE	NTS	FILE NAME	630C2151-1A1.dwg	SHEET	1 of 1
-------	-----	-----------	------------------	-------	--------