
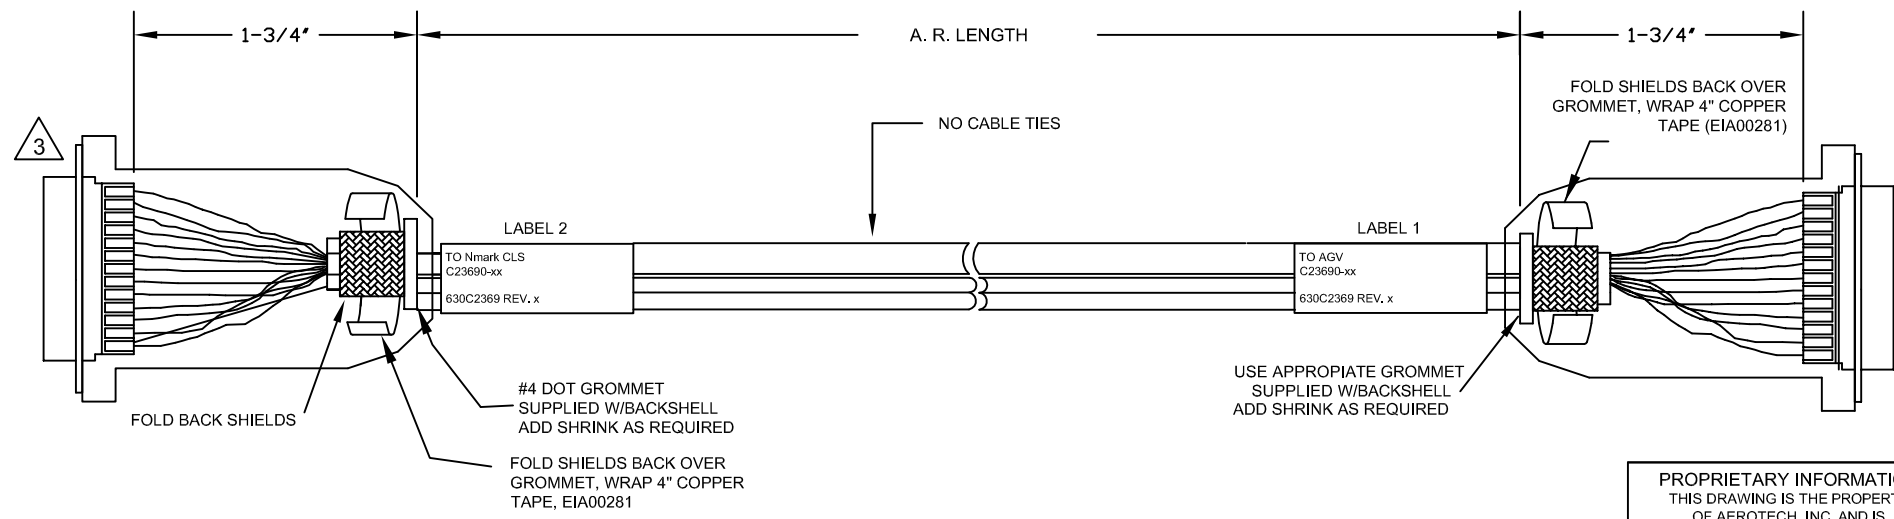
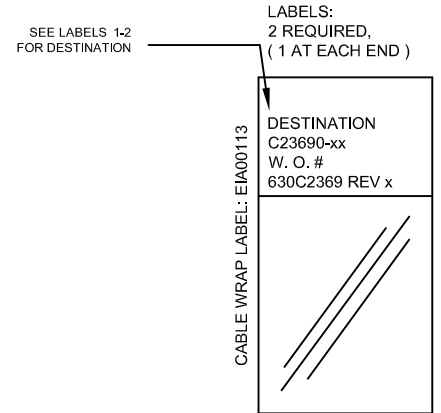




REVISIONS			
REV.	DESCRIPTION	DATE	DRAWN
A	ADDED ECN 16884	10/1/2015	JFM

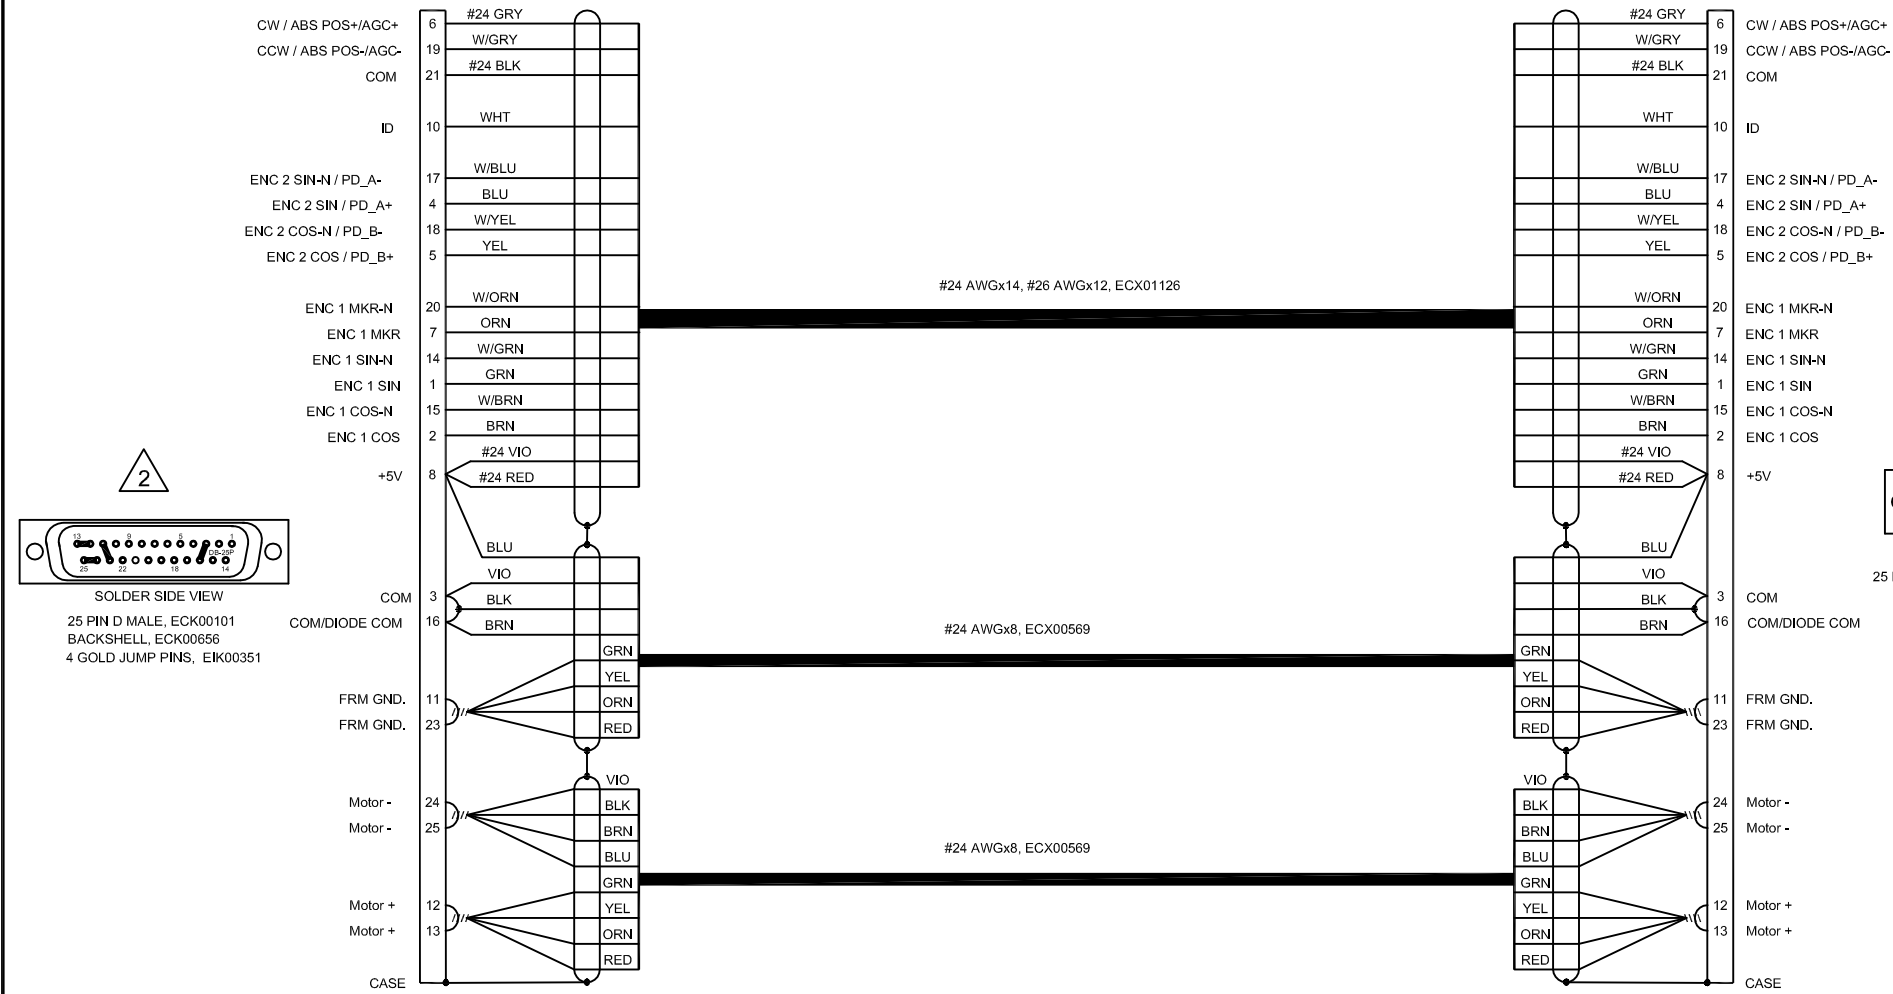

- 2 APPLY SHRINK TUBING TO ALL WIRE/SOLDER-CUP JOINTS. CARE MUST BE TAKEN NOT TO OVER-HEAT THE WIRES DURING SOLDERING AND THE APPLICATION OF THE SHRINK TUBING. SHRINK TUBING IS TO INSULATE ADJACENT CONTACTS AND PROVIDE STRIAN RELIEF FOR THE INDIVIDUAL WIRES.
- 1 STARTING CABLE LENGTH SHOULD BE 4 IN LONGER THAN TOTAL LENGTH OF CABLE.

PROPRIETARY INFORMATION THIS DRAWING IS THE PROPERTY OF AEROTECH, INC. AND IS SUBMITTED IN CONFIDENCE AND SHALL NOT BE REPRODUCED NOR COPIED NOR DISCLOSED TO OTHERS UNDER PENALTY OF LAW.			AEROTECH, INC. 101 Zeta Drive Pittsburgh, PA. 15238-2897 (412) 963-7470 www.aerotech.com		
TOLERANCES ON FRACTIONS DECIMALS ANGLES 0 TO 6 1/32 .XX ±01 ± 0-30° OVER 6 ±1/16 .XXX ±005			<h2 style="text-align: center;">AGV To Nmark CLS</h2> <h3 style="text-align: center;">GALVO 25D-25D-10ARMS-HF65-MAX120DM</h3>		
RMS FINISH	✓ EXCEPT AS NOTED		PART CODE	SIZE	REV.
DRAWN	11/1/2011	JFM	C23690	C	A
CHECKED	11/1/2011	AGS	630C2369		
APPD.	11/1/2011	AGS	SCALE NTS	FILE NAME 630C2369.Dwg	SHEET 1 of 1