



REVISIONS			
REV.	DESCRIPTION	DATE	DRAWN

5 PIN MALE HPD, ECK01236
 20 AMP PIN, ECK00660
 BACKSHELL, ECK00656
 POPULATE ALL CONTACT POSITIONS

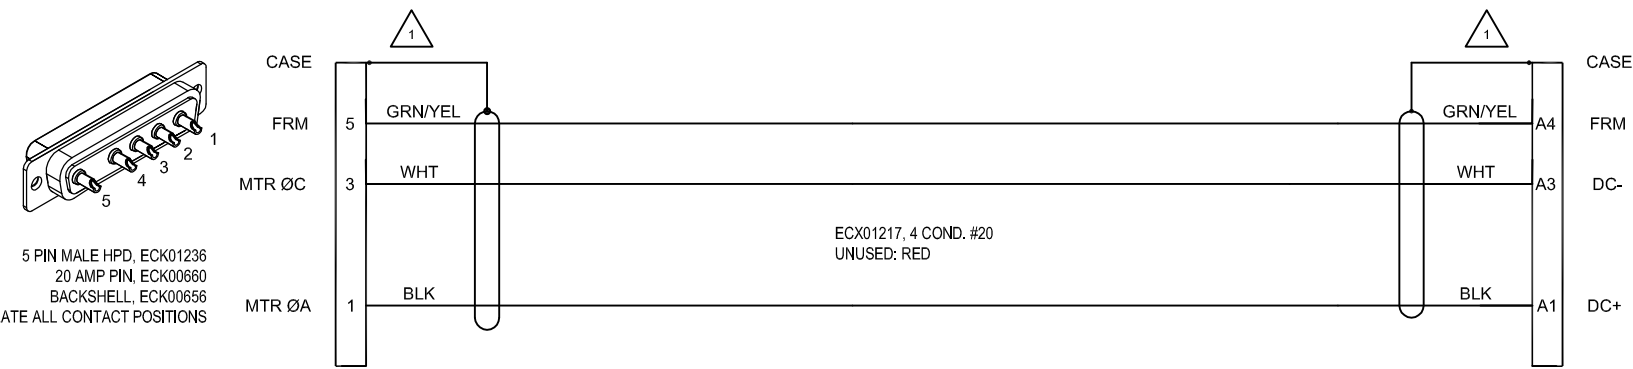


HPD FEMALE "D", ECK00657
 SOCKET CONTACT, ECK00659
 BACK SHELL, ECK00656

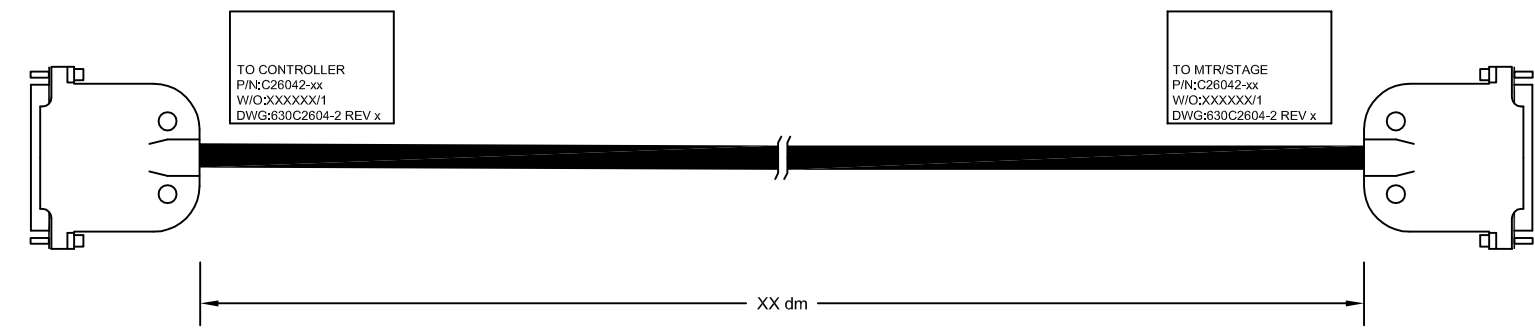

- 4 LABELS:
CABLE WRAP LABEL: EIA00113
- 3 VERIFY GROMMET IS SECURED TIGHTLY AROUND CABLE.
IF NECESSARY BUILD UP WITH SHRINK TUBING.
- 2 INSULATE ALL SOLDER CUP CONNECTIONS WITH
HEATSHRINK, TYP. EIW00104.

1 SHIELD TERMINATION

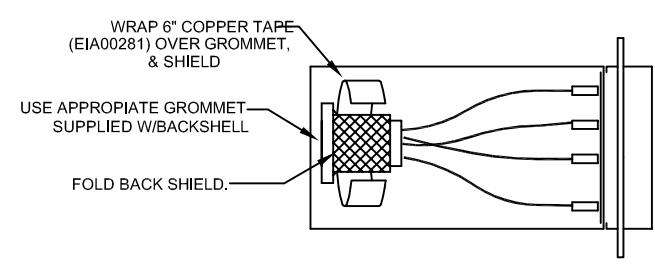

PROPRIETARY INFORMATION
 THIS DRAWING IS THE PROPERTY
 OF AEROTECH, INC. AND IS
 SUBMITTED IN CONFIDENCE AND
 SHALL NOT BE REPRODUCED NOR
 COPIED NOR DISCLOSED TO OTHERS
 UNDER PENALTY OF LAW.

AEROTECH
 AEROTECH, INC. 101 Zeta Drive
 Pittsburgh, PA. 15238
 (412)963-7470
 www.aerotech.com

TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
0 TO 6 ±1/32	.XX ±.01	± 0-30'
OVER 6 ±1/16	.XXX ±.005	

C26042-XX for Npaq MR/XR
DC MTR-5D-4D-5ARMS-MAX450DM
 (DC MOTOR CABLE WITH FLYING LEADS)

RMS FINISH		EXCEPT AS NOTED	PART CODE		SIZE	REV.
DRAWN	JFM	12/27/17	C26042	C	630C2604-2	-
CHECKED	JAB	12/27/17	SCALE	NTS	FILE NAME	630C2604-2.Dwg
APPD.	JFM	12/27/17	SHEET	1 of 1		