

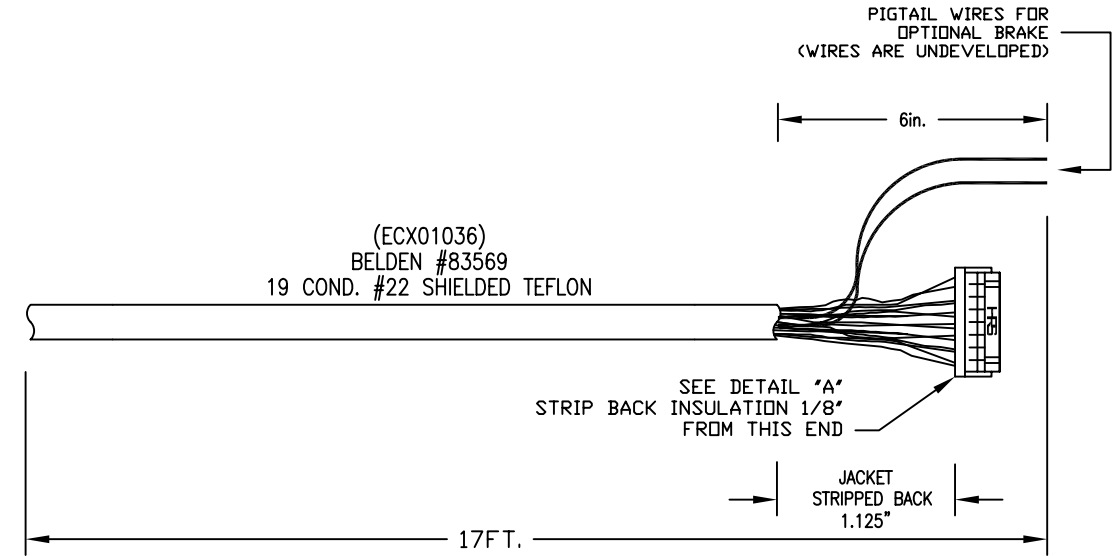


1 ALL WIRE SPLICES MUST BE COVERED WITH TEFLON TUBING OR TEFLON SHRINK TUBING

2 USE HRS CRIMP MACHINE TO CRIMP SOCKETS

3 STARTING CABLE LENGTH = 17FT.

REVISIONS				
SYM.	ZONE	DESCRIPTION	DATE	APPROVAL

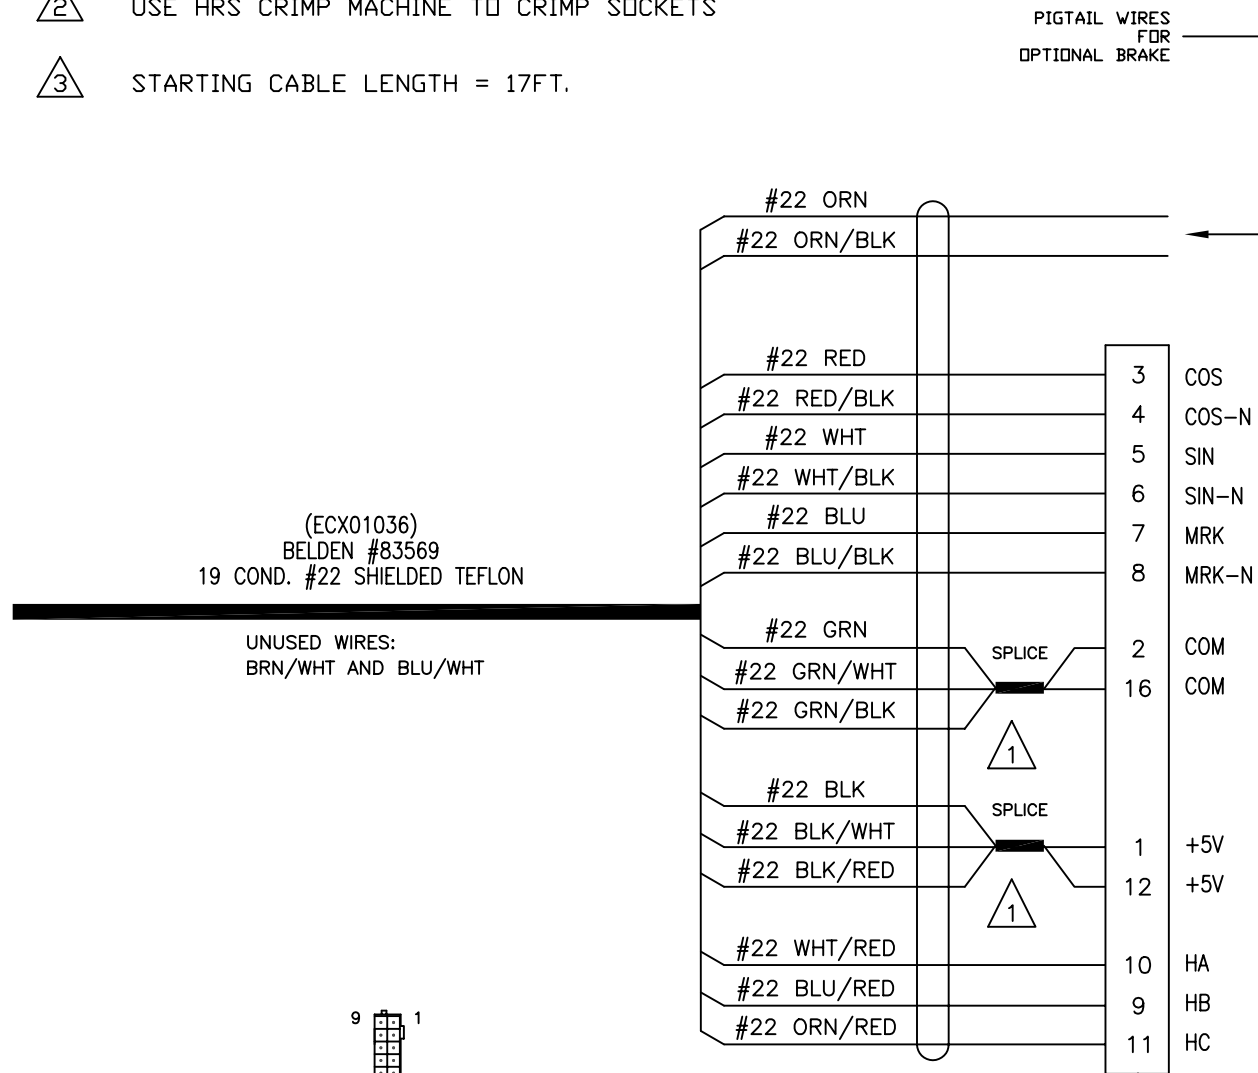

DETAIL "A"

VIEWED FROM WIRE SIDE OF CONNECTOR  
HIROSE SOCKET DF11-16DS-2C (EIK00590)

CONTACTS (EIK00591)  
DF11-2428SC  
CONNECTOR (EIK00590) WITH  
HIROSE DF11-16DS-2C

MACHINING TOLERANCE MANUAL MM-1000 APPLIES UNLESS OTHERWISE SPECIFIED		
TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
0 TO 6+0R- 1/32	.XX +0R- .01	+0R- 0-30'
OVER 6+0R- 1/16	.XXX +0R- .005	
RMS FINISH	✓	EXCEPT AS NOTED
DRAWN	JAB	1/25/01
CHECKED	AGS	1/25/01
DESIGN		
ENGRG		
PROD		
Q. A.		
APPD	AGS	1/25/01



® AEROTECH, INC. 101 Zeta Drive  
Pittsburgh, PA. 15238  
(412)963-7470 TWX710-795-3125

VAC6 BRUSHLESS MOTOR  
FRAME SIZE 23/34/42  
RENCO ENCODER CABLE

CODE IDENT. NO.	SIZE	REV.
EFO01006	B 630B1715-2	-
SCALE NTS	FILE NAME: 630B171502	SHEET 1