

REVISIONS			
REV.	ZONE	DESCRIPTION	DRAWN

15 PIN FEMALE "D" (ECK00326)
BACKSHELL (ECK01022)
(11) JUMPERS (EIK00351)

CABLE (4 COND. #16), ECX00566

5 PIN MALE "HPD" (ECK01236)
(5) PIN CONTACTS (ECK00660)
BACKSHELL (ECK00656)
POPULATE ALL CONTACT POSITIONS

CABLE (4 COND. #16), ECX00566

SOCKET	WIRE	SIGNAL
BACKSHELL	SHLD	MTR SHLD
5	#22 GRN	MTR SHLD
	GRN/YEL	FRM GND
1	BLK	MTR ØA
2	RED	MTR ØB
3	WHT	MTR ØC


SIGNAL	WIRE	SOCKET
MTR SHLD	SHLD	BACKSHELL
MTR SHLD	#22 GRN	1
FRM GND	GRN/YEL	9
		2
		10
		3
MTR ØC	WHT	11
		4
		12
		5
MTR ØB	RED	13
		6
		14
		7
MTR ØA	BLK	15
		8



EIK00351 JUMPER DETAIL VIEWED FROM WIRE SIDE OF CONNECTOR 15 PIN "D" FEMALE CONNECTOR

LABELS FOR C25622 CABLES: (2) REQUIRED, (1 AT EACH END)

SEE LABELS 1 & 2 FOR DESTINATION

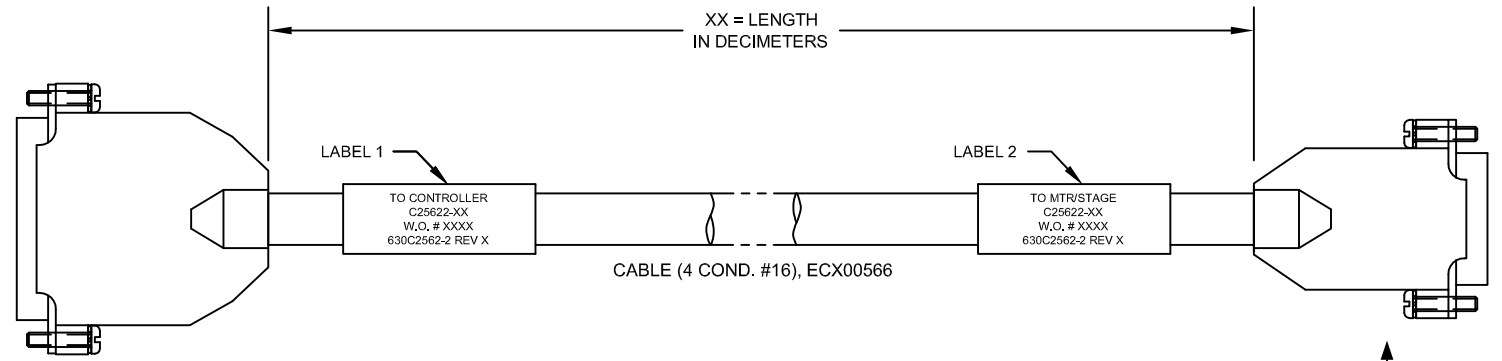

SEE DETAIL "A" COVER ALL SOLDER CONTACTS WITH HEATSHRINK.



XX (DECIMETER) X .328 = FT.
STARTING LENGTH = XX FT + 1.25 FT.

PROPRIETARY INFORMATION
THIS DRAWING IS THE PROPERTY OF AEROTECH, INC. AND IS SUBMITTED IN CONFIDENCE AND SHALL NOT BE REPRODUCED NOR COPIED NOR DISCLOSED TO OTHERS UNDER PENALTY OF LAW.



AEROTECH, INC. 101 Zeta Drive
Pittsburgh, PA. 15238
(412)963-7470
www.aerotech.com

TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
0 TO 6 ± 1/32	.XX ± .01	± 0-30'
OVER 6 ± 1/16	.XXX ± .005	

RMS FINISH EXCEPT AS NOTED

C25622-XX
MOTOR CABLE
CABLE: BL MTR-5DU-15DU-10ARMS

DRAWN	EJB	5/10/16
CHECKED	EJB	5/10/16
APPD.	EJB	5/10/16

PART CODE	SIZE	REV.
C25622-XX	C	-
SCALE NTS	FILE NAME	SHEET
	630C2562-201.DWG	1 OF 1